

Холодильники - прилавки ЕР1/2М, ЕР1/3Н

Технические характеристики

По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +(727)345-47-04

Беларусь +(375)257-127-884

Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

эл.почта: fdf@nt-rt.ru || сайт: <https://foster.nt-rt.ru/>



EP1/2M: 280 Ltr Counter Refrigerator

43-110

Two door meat storage counter

About the product

With EcoPro G3 Counters you get the best of both worlds: high performance coupled with low energy consumption, from the Refrigeration Experts.

Why choose this product

- A reduced footprint – the more compact design of G3 counters allow them to fit in the tightest of kitchen spaces without losing capacity
- Taking the travel out of food preparation and customised to your needs, G3 counters offer unrivalled flexibility and quality.
- High performance cyclopentane foam maintains thermal efficiency for longer
- Fully floating lock provides durable security and prevents lock breakage if the key is left in
- New and improved 'Airlines' ventilation system cools the compressor which reduces running time, saving you energy
- With PureControl, the G3's controller display uses pure LEDs, incorporating InGaN technology, which means it achieves higher resolution, lasts longer – all while using less power. Through the simple addition of a gateway, you're connectivity-ready
- High quality 304 stainless steel is used as standard on all doors and unit covers for G3 – the gold standard in performance stainless steel – meaning the heaviest usage touchpoints on the product are covered
- Operates in ambient temperatures of up to 43°C

Specification

Technical

Refrigerant	R290
Temperature	Meat -2/+2°C
Electrical supply	230/50/1
Fuse rating (A)	10
Current (A)	1.9
Power (W)	440
Refrigerant mass (g)	80
Thermal heat rejection (W)	410

Dimensions

Height (mm)	865
Width (mm)	1365
Depth (mm)	700
Gross volume (ltr)	280
Net volume (ltr)	172.3
Leg type	Braked castors
GN size	1/1
Gross weight (kg)	137
Net weight (kg)	123

Build

Finish ext/int	304 S/S & Alu
Number of sections	2
Section configuration	Left hinge-Right hinge
System	Integral
Worktop features	Standard

Energy

Climate Class	5
GWP	3

Footnotes

- Castors not available if product supplied less condensing unit
- 100mm leg option: height ranges from 835 to 865mm (replacement for standard castors). 150mm legs: height ranges from 885 to 935mm
- Adequate airflow must be kept around the counter: 50mm
- Depth with door open is 1113mm



EP1/2M: 280 Ltr Counter Refrigerator

43-112

Two door meat storage counter

About the product

With EcoPro G3 Counters you get the best of both worlds: high performance coupled with low energy consumption, from the Refrigeration Experts.

Why choose this product

- A reduced footprint – the more compact design of G3 counters allow them to fit in the tightest of kitchen spaces without losing capacity
- Taking the travel out of food preparation and customised to your needs, G3 counters offer unrivalled flexibility and quality.
- High performance cyclopentane foam maintains thermal efficiency for longer
- Fully floating lock provides durable security and prevents lock breakage if the key is left in
- New and improved 'Airlines' ventilation system cools the compressor which reduces running time, saving you energy
- With PureControl, the G3's controller display uses pure LEDs, incorporating InGaN technology, which means it achieves higher resolution, lasts longer – all while using less power. Through the simple addition of a gateway, you're connectivity-ready
- High quality 304 stainless steel is used as standard on all doors and unit covers for G3 – the gold standard in performance stainless steel – meaning the heaviest usage touchpoints on the product are covered
- Operates in ambient temperatures of up to 43°C

Specification

Technical

Refrigerant	R290
Temperature	Meat -2/+2°C
Electrical supply	230/50/1
Fuse rating (A)	10
Current (A)	19
Power (W)	440
Refrigerant mass (g)	80
Thermal heat rejection (W)	410

Dimensions

Height (mm)	865
Width (mm)	1365
Depth (mm)	700
Gross volume (ltr)	280
Net volume (ltr)	172.3
Leg type	Castors
GN size	1/1
Gross weight (kg)	137
Net weight (kg)	123

Build

Finish ext/int	304 S/S & 304 S/S
Number of sections	2
Section configuration	Left hinge-Right hinge
System	Integral
Worktop features	Standard

Energy

Climate Class	5
GWP	3

Footnotes

- Castors not available if product supplied less condensing unit
- 100mm leg option: height ranges from 835 to 865mm (replacement for standard castors). 150mm legs: height ranges from 885 to 935mm
- Adequate airflow must be kept around the counter: 50mm
- Depth with door open is 1113mm



EP1/3H: 435 Ltr Counter Refrigerator

43-176

Three door refrigerator counter

About the product

With EcoPro G3 Counters you get the best of both worlds: high performance coupled with low energy consumption, from the Refrigeration Experts.

Why choose this product

- A reduced footprint – the more compact design of G3 counters allow them to fit in the tightest of kitchen spaces without losing capacity
- Taking the travel out of food preparation and customised to your needs, G3 counters offer unrivalled flexibility and quality.
- High performance cyclopentane foam maintains thermal efficiency for longer
- Fully floating lock provides durable security and prevents lock breakage if the key is left in
- New and improved 'Airlines' ventilation system cools the compressor which reduces running time, saving you energy
- With PureControl, the G3's controller display uses pure LEDs, incorporating InGaN technology, which means it achieves higher resolution, lasts longer – all while using less power. Through the simple addition of a gateway, you're connectivity-ready
- High quality 304 stainless steel is used as standard on all doors and unit covers for G3 – the gold standard in performance stainless steel – meaning the heaviest usage touchpoints on the product are covered
- Operates in ambient temperatures of up to 43°C

Specification

Technical

Refrigerant	R290
Temperature	Refrigerator +1/ +4°C
Electrical supply	230/50/1
Fuse rating (A)	10
Current (A)	0.8
Power (W)	182
Refrigerant mass (g)	110
Thermal heat rejection (W)	200

Dimensions

Height (mm)	865
Width (mm)	1815
Depth (mm)	700
Gross volume (ltr)	435
Net volume (ltr)	250.6
Leg type	Braked castors
GN size	1/1
Gross weight (kg)	175
Net weight (kg)	160

Build


Finish ext/int	304 S/S & Alu
Number of sections	3
Section configuration	Left hinge-Left hinge-Right hinge
System	Integral
Worktop features	Standard

Energy

Climate Class	5
Energy grade	A
EEl	22.39
AEC (kWh)	541.09
GWP	3
Energy consumption (kWh/24hr)	1.48

Footnotes

- Castors not available if product supplied less condensing unit
- 100mm leg option: height ranges from 835 to 865mm (replacement for standard castors). 150mm legs: height ranges from 885 to 935mm
- Adequate airflow must be kept around the counter: 50mm
- Depth with door open is 1113mm

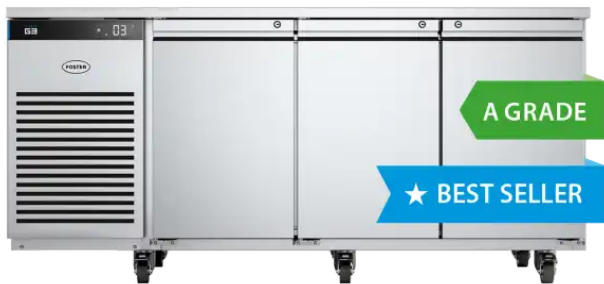

EP1/3H: 435 Ltr Counter Refrigerator

43-178

Three door refrigerator counter

About the product

With EcoPro G3 Counters you get the best of both worlds: high performance coupled with low energy consumption, from the Refrigeration Experts.

Why choose this product

- A reduced footprint – the more compact design of G3 counters allow them to fit in the tightest of kitchen spaces without losing capacity
- Taking the travel out of food preparation and customised to your needs, G3 counters offer unrivalled flexibility and quality.
- High performance cyclopentane foam maintains thermal efficiency for longer
- Fully floating lock provides durable security and prevents lock breakage if the key is left in
- New and improved 'Airlines' ventilation system cools the compressor which reduces running time, saving you energy
- With PureControl, the G3's controller display uses pure LEDs, incorporating InGaN technology, which means it achieves higher resolution, lasts longer – all while using less power. Through the simple addition of a gateway, you're connectivity-ready
- High quality 304 stainless steel is used as standard on all doors and unit covers for G3 – the gold standard in performance stainless steel – meaning the heaviest usage touchpoints on the product are covered
- Operates in ambient temperatures of up to 43°C

Specification

Technical

Refrigerant	R290
Temperature	Refrigerator +1/ +4°C
Electrical supply	230/50/1
Fuse rating (A)	10
Current (A)	0.8
Power (W)	182
Refrigerant mass (g)	110
Thermal heat rejection (W)	200

Dimensions

Height (mm)	865
Width (mm)	1815
Depth (mm)	700
Gross volume (ltr)	435
Net volume (ltr)	250.6
Leg type	Braked castors
GN size	1/1
Gross weight (kg)	175
Net weight (kg)	160

Build

Finish ext/int	304 S/S & 304 S/S
Number of sections	3
Section configuration	Left hinge-Left hinge-Right hinge
System	Integral
Worktop features	Standard

Energy

Climate Class	5
Energy grade	A
EEl	22.39
AEC (kWh)	541.09
GWP	3
Energy consumption (kWh/24hr)	1.48

Footnotes

- Castors not available if product supplied less condensing unit
- 100mm leg option: height ranges from 835 to 865mm (replacement for standard castors). 150mm legs: height ranges from 885 to 935mm
- Adequate airflow must be kept around the counter: 50mm
- Depth with door open is 1113mm



EP1/3H: 435 Ltr Counter Refrigerator

43-214

Drawer combination refrigerator counter

About the product

With EcoPro G3 Counters you get the best of both worlds: high performance coupled with low energy consumption, from the Refrigeration Experts.

Why choose this product

- A reduced footprint – the more compact design of G3 counters allow them to fit in the tightest of kitchen spaces without losing capacity
- Taking the travel out of food preparation and customised to your needs, G3 counters offer unrivalled flexibility and quality.
- High performance cyclopentane foam maintains thermal efficiency for longer
- Fully floating lock provides durable security and prevents lock breakage if the key is left in
- New and improved 'Airlines' ventilation system cools the compressor which reduces running time, saving you energy
- With PureControl, the G3's controller display uses pure LEDs, incorporating InGaN technology, which means it achieves higher resolution, lasts longer – all while using less power. Through the simple addition of a gateway, you're connectivity-ready
- High quality 304 stainless steel is used as standard on all doors and unit covers for G3 – the gold standard in performance stainless steel – meaning the heaviest usage touchpoints on the product are covered
- Drawers provide increased storage flexibility and easier access to ingredients
- Operates in ambient temperatures of up to 43°C

Specification

Technical

Refrigerant	R290
Temperature	Refrigerator +1/+4°C
Electrical supply	230/50/1
Fuse rating (A)	10
Current (A)	0.8
Power (W)	182
Refrigerant mass (g)	110
Thermal heat rejection (W)	200

Dimensions

Height (mm)	865
Width (mm)	1815
Depth (mm)	700
Gross volume (ltr)	435
Net volume (ltr)	250.6
Leg type	Braked castors
GN size	1/1
Gross weight (kg)	175
Net weight (kg)	160

Build

Finish ext/int	304 S/S & 304 S/S
Number of sections	3
Section configuration	Left hinge-Left hinge-1/2
System	Integral
Worktop features	Standard

Energy

Climate Class	5
Energy grade	A
EEl	22.39
AEC (kWh)	541.09
GWP	3
Energy consumption (kWh/24hr)	1.48

Footnotes

- Castors not available if product supplied less condensing unit
- 100mm leg option: height ranges from 835 to 865mm (replacement for standard castors). 150mm legs: height ranges from 885 to 935mm
- Adequate airflow must be kept around the counter: 50mm
- Depth with door open is 1113mm
- Any mix of two or three drawer units is possible, as is any combination of drawers and doors. Important – drawer sections are supplied without shelves. Will accommodate pans (optional extra): 1/2 drawers up to 150mm, 1/3 drawers up to 100mm (top drawer max. 70mm on 1/3 drawers)



EP1/3H: 435 Ltr Counter Refrigerator

43-212

Drawer combination refrigerator counter

About the product

With EcoPro G3 Counters you get the best of both worlds: high performance coupled with low energy consumption, from the Refrigeration Experts.

Why choose this product

- A reduced footprint – the more compact design of G3 counters allow them to fit in the tightest of kitchen spaces without losing capacity
- Taking the travel out of food preparation and customised to your needs, G3 counters offer unrivalled flexibility and quality.
- High performance cyclopentane foam maintains thermal efficiency for longer
- Fully floating lock provides durable security and prevents lock breakage if the key is left in
- New and improved 'Airlines' ventilation system cools the compressor which reduces running time, saving you energy
- With PureControl, the G3's controller display uses pure LEDs, incorporating InGaN technology, which means it achieves higher resolution, lasts longer – all while using less power. Through the simple addition of a gateway, you're connectivity-ready
- High quality 304 stainless steel is used as standard on all doors and unit covers for G3 – the gold standard in performance stainless steel – meaning the heaviest usage touchpoints on the product are covered
- Drawers provide increased storage flexibility and easier access to ingredients
- Operates in ambient temperatures of up to 43°C

Specification

Technical

Refrigerant	R290
Temperature	Refrigerator +1/+4°C
Electrical supply	230/50/1
Fuse rating (A)	10
Current (A)	0.8
Power (W)	182
Refrigerant mass (g)	110
Thermal heat rejection (W)	200

Dimensions

Height (mm)	865
Width (mm)	1815
Depth (mm)	700
Gross volume (ltr)	435
Net volume (ltr)	250.6
Leg type	Braked castors
GN size	1/1
Gross weight (kg)	175
Net weight (kg)	160

Build

Finish ext/int	304 S/S & Alu
Number of sections	3
Section configuration	Left hinge-Left hinge-1/2
System	Integral
Worktop features	Standard

Energy

Climate Class	5
Energy grade	A
EEl	22.39
AEC (kWh)	541.09
GWP	3
Energy consumption (kWh/24hr)	1.48

Footnotes

- Castors not available if product supplied less condensing unit
- 100mm leg option: height ranges from 835 to 865mm (replacement for standard castors). 150mm legs: height ranges from 885 to 935mm
- Adequate airflow must be kept around the counter: 50mm
- Depth with door open is 1113mm
- Any mix of two or three drawer units is possible, as is any combination of drawers and doors. Important – drawer sections are supplied without shelves. Will accommodate pans (optional extra): 1/2 drawers up to 150mm, 1/3 drawers up to 100mm (top drawer max. 70mm on 1/3 drawers)



EP1/3H: 435 Ltr Counter Refrigerator

43-222

Drawer combination refrigerator counter

About the product

With EcoPro G3 Counters you get the best of both worlds: high performance coupled with low energy consumption, from the Refrigeration Experts.

Why choose this product

- A reduced footprint – the more compact design of G3 counters allow them to fit in the tightest of kitchen spaces without losing capacity
- Taking the travel out of food preparation and customised to your needs, G3 counters offer unrivalled flexibility and quality.
- High performance cyclopentane foam maintains thermal efficiency for longer
- Fully floating lock provides durable security and prevents lock breakage if the key is left in
- New and improved 'Airlines' ventilation system cools the compressor which reduces running time, saving you energy
- With PureControl, the G3's controller display uses pure LEDs, incorporating InGaN technology, which means it achieves higher resolution, lasts longer – all while using less power. Through the simple addition of a gateway, you're connectivity-ready
- High quality 304 stainless steel is used as standard on all doors and unit covers for G3 – the gold standard in performance stainless steel – meaning the heaviest usage touchpoints on the product are covered
- Drawers provide increased storage flexibility and easier access to ingredients

Specification

Technical

Refrigerant	R290
Temperature	Refrigerator +1/ +4°C
Electrical supply	230/50/1
Fuse rating (A)	10
Current (A)	0.8
Power (W)	182
Refrigerant mass (g)	110
Thermal heat rejection (W)	200

Dimensions

Height (mm)	865
Width (mm)	1815
Depth (mm)	700
Gross volume (ltr)	435
Net volume (ltr)	250.6
Leg type	Braked castors
GN size	1/1
Gross weight (kg)	175
Net weight (kg)	160

Build

Finish ext/int	304 S/S & 304 S/S
Number of sections	3
Section configuration	1/2-1/2-1/2
System	Integral
Worktop features	Standard

Energy

Climate Class	5
Energy grade	A
EEI	22.39
AEC (kWh)	541.09
GWP	3
Energy consumption (kWh/24hr)	1.48

Footnotes

- Castors not available if product supplied less condensing unit
- 100mm leg option: height ranges from 835 to 865mm (replacement for standard castors). 150mm legs: height ranges from 885 to 935mm
- Adequate airflow must be kept around the counter: 50mm
- Depth with door open is 1113mm
- Any mix of two or three drawer units is possible, as is any combination of drawers and doors. Important – drawer sections are supplied without shelves. Will accommodate pans (optional extra): 1/2 drawers up to 150mm, 1/3 drawers up to 100mm (top drawer max. 70mm on 1/3 drawers)



EP1/3H: 435 Ltr Counter Refrigerator

43-218

Drawer combination refrigerator counter

About the product

With EcoPro G3 Counters you get the best of both worlds: high performance coupled with low energy consumption, from the Refrigeration Experts.

Why choose this product

- A reduced footprint – the more compact design of G3 counters allow them to fit in the tightest of kitchen spaces without losing capacity
- Taking the travel out of food preparation and customised to your needs, G3 counters offer unrivalled flexibility and quality.
- High performance cyclopentane foam maintains thermal efficiency for longer
- Fully floating lock provides durable security and prevents lock breakage if the key is left in
- New and improved 'Airlines' ventilation system cools the compressor which reduces running time, saving you energy
- With PureControl, the G3's controller display uses pure LEDs, incorporating InGaN technology, which means it achieves higher resolution, lasts longer – all while using less power. Through the simple addition of a gateway, you're connectivity-ready
- High quality 304 stainless steel is used as standard on all doors and unit covers for G3 – the gold standard in performance stainless steel – meaning the heaviest usage touchpoints on the product are covered
- Drawers provide increased storage flexibility and easier access to ingredients
- Operates in ambient temperatures of up to 43°C

Specification

Technical

Refrigerant	R290
Temperature	Refrigerator +1/+4°C
Electrical supply	230/50/1
Fuse rating (A)	10
Current (A)	0.8
Power (W)	182
Refrigerant mass (g)	110
Thermal heat rejection (W)	200

Dimensions

Height (mm)	865
Width (mm)	1815
Depth (mm)	700
Gross volume (ltr)	435
Net volume (ltr)	250.6
Leg type	Braked castors
GN size	1/1
Gross weight (kg)	175
Net weight (kg)	160

Build

Finish ext/int	304 S/S & 304 S/S
Number of sections	3
Section configuration	Left hinge-1/2- 1/2
System	Integral
Worktop features	Right mounted

Energy

Climate Class	5
Energy grade	A
EEl	22.39
AEC (kWh)	541.09
GWP	3
Energy consumption (kWh/24hr)	1.48

Footnotes

- Castors not available if product supplied less condensing unit
- 100mm leg option: height ranges from 835 to 865mm (replacement for standard castors). 150mm legs: height ranges from 885 to 935mm
- Adequate airflow must be kept around the counter: 50mm
- Depth with door open is 1113mm
- Any mix of two or three drawer units is possible, as is any combination of drawers and doors. Important – drawer sections are supplied without shelves. Will accommodate pans (optional extra): 1/2 drawers up to 150mm, 1/3 drawers up to 100mm (top drawer max. 70mm on 1/3 drawers)



EP1/3H: 435 Ltr Counter Refrigerator

43-230

Drawer combination refrigerator counter

About the product

With EcoPro G3 Counters you get the best of both worlds: high performance coupled with low energy consumption, from the Refrigeration Experts.

Why choose this product

- A reduced footprint – the more compact design of G3 counters allow them to fit in the tightest of kitchen spaces without losing capacity
- Taking the travel out of food preparation and customised to your needs, G3 counters offer unrivalled flexibility and quality.
- High performance cyclopentane foam maintains thermal efficiency for longer
- Fully floating lock provides durable security and prevents lock breakage if the key is left in
- New and improved 'Airlines' ventilation system cools the compressor which reduces running time, saving you energy
- With PureControl, the G3's controller display uses pure LEDs, incorporating InGaN technology, which means it achieves higher resolution, lasts longer – all while using less power. Through the simple addition of a gateway, you're connectivity-ready
- High quality 304 stainless steel is used as standard on all doors and unit covers for G3 – the gold standard in performance stainless steel – meaning the heaviest usage touchpoints on the product are covered
- Drawers provide increased storage flexibility and easier access to ingredients
- Operates in ambient temperatures of up to 43°C

Specification

Technical

Refrigerant	R290
Temperature	Refrigerator +1/+4°C
Electrical supply	230/50/1
Fuse rating (A)	10
Current (A)	0.8
Power (W)	182
Refrigerant mass (g)	110
Thermal heat rejection (W)	200

Dimensions

Height (mm)	865
Width (mm)	1815
Depth (mm)	700
Gross volume (ltr)	435
Net volume (ltr)	250.6
Leg type	Braked castors
GN size	1/1
Gross weight (kg)	175
Net weight (kg)	160

Build

Finish ext/int	304 S/S & 304 S/S
Number of sections	3
Section configuration	Left hinge-1/3- 1/3
System	Integral
Worktop features	Standard

Energy

Climate Class	5
Energy grade	A
EEl	22.39
AEC (kWh)	541.09
GWP	3
Energy consumption (kWh/24hr)	1.48

Footnotes

- Castors not available if product supplied less condensing unit
- 100mm leg option: height ranges from 835 to 865mm (replacement for standard castors). 150mm legs: height ranges from 885 to 935mm
- Adequate airflow must be kept around the counter: 50mm
- Depth with door open is 1113mm
- Any mix of two or three drawer units is possible, as is any combination of drawers and doors. Important – drawer sections are supplied without shelves. Will accommodate pans (optional extra): 1/2 drawers up to 150mm, 1/3 drawers up to 100mm (top drawer max. 70mm on 1/3 drawers)



EP1/3H: 435 Ltr Counter Refrigerator

43-220

Drawer combination refrigerator counter

About the product

With EcoPro G3 Counters you get the best of both worlds: high performance coupled with low energy consumption, from the Refrigeration Experts.

Why choose this product

- A reduced footprint – the more compact design of G3 counters allow them to fit in the tightest of kitchen spaces without losing capacity
- Taking the travel out of food preparation and customised to your needs, G3 counters offer unrivalled flexibility and quality.
- High performance cyclopentane foam maintains thermal efficiency for longer
- Fully floating lock provides durable security and prevents lock breakage if the key is left in
- New and improved 'Airlines' ventilation system cools the compressor which reduces running time, saving you energy
- With PureControl, the G3's controller display uses pure LEDs, incorporating InGaN technology, which means it achieves higher resolution, lasts longer – all while using less power. Through the simple addition of a gateway, you're connectivity-ready
- High quality 304 stainless steel is used as standard on all doors and unit covers for G3 – the gold standard in performance stainless steel – meaning the heaviest usage touchpoints on the product are covered
- Drawers provide increased storage flexibility and easier access to ingredients

Specification

Technical		Dimensions	
Refrigerant	R290	Height (mm)	865
Temperature	Refrigerator +1/ +4°C	Width (mm)	1815
Electrical supply	230/50/1	Depth (mm)	700
Fuse rating (A)	10	Gross volume (ltr)	435
Current (A)	0.8	Net volume (ltr)	250.6
Power (W)	182	Leg type	Braked castors
Refrigerant mass (g)	110	GN size	1/1
Thermal heat rejection (W)	200	Gross weight (kg)	175
		Net weight (kg)	160

Build		Energy	
Finish ext/int	304 S/S & Alu	Climate Class	5
Number of sections	3	Energy grade	A
Section configuration	1/2-1/2-1/2	EEI	22.39
System	Integral	AEC (kWh)	541.09
Worktop features	Standard	GWP	3
		Energy consumption (kWh/24hr)	1.48

Footnotes

- Castors not available if product supplied less condensing unit
- 100mm leg option: height ranges from 835 to 865mm (replacement for standard castors). 150mm legs: height ranges from 885 to 935mm
- Adequate airflow must be kept around the counter: 50mm
- Depth with door open is 1113mm
- Any mix of two or three drawer units is possible, as is any combination of drawers and doors. Important – drawer sections are supplied without shelves. Will accommodate pans (optional extra): 1/2 drawers up to 150mm, 1/3 drawers up to 100mm (top drawer max. 70mm on 1/3 drawers)



EP1/3H: 435 Ltr Counter Refrigerator

43-216

Drawer combination refrigerator counter

About the product

With EcoPro G3 Counters you get the best of both worlds: high performance coupled with low energy consumption, from the Refrigeration Experts.

Why choose this product

- A reduced footprint – the more compact design of G3 counters allow them to fit in the tightest of kitchen spaces without losing capacity
- Taking the travel out of food preparation and customised to your needs, G3 counters offer unrivalled flexibility and quality.
- High performance cyclopentane foam maintains thermal efficiency for longer
- Fully floating lock provides durable security and prevents lock breakage if the key is left in
- New and improved 'Airlines' ventilation system cools the compressor which reduces running time, saving you energy
- With PureControl, the G3's controller display uses pure LEDs, incorporating InGaN technology, which means it achieves higher resolution, lasts longer – all while using less power. Through the simple addition of a gateway, you're connectivity-ready
- High quality 304 stainless steel is used as standard on all doors and unit covers for G3 – the gold standard in performance stainless steel – meaning the heaviest usage touchpoints on the product are covered
- Drawers provide increased storage flexibility and easier access to ingredients
- Operates in ambient temperatures of up to 43°C

Specification

Technical

Refrigerant	R290
Temperature	Refrigerator +1/+4°C
Electrical supply	230/50/1
Fuse rating (A)	10
Current (A)	0.8
Power (W)	182
Refrigerant mass (g)	110
Thermal heat rejection (W)	200

Dimensions

Height (mm)	865
Width (mm)	1815
Depth (mm)	700
Gross volume (ltr)	435
Net volume (ltr)	250.6
Leg type	Braked castors
GN size	1/1
Gross weight (kg)	175
Net weight (kg)	160

Build

Finish ext/int	304 S/S & Alu
Number of sections	3
Section configuration	Left hinge-1/2- 1/2
System	Integral
Worktop features	Right mounted

Energy

Climate Class	5
Energy grade	A
EEl	22.39
AEC (kWh)	541.09
GWP	3
Energy consumption (kWh/24hr)	1.48

Footnotes

- Castors not available if product supplied less condensing unit
- 100mm leg option: height ranges from 835 to 865mm (replacement for standard castors). 150mm legs: height ranges from 885 to 935mm
- Adequate airflow must be kept around the counter: 50mm
- Depth with door open is 1113mm
- Any mix of two or three drawer units is possible, as is any combination of drawers and doors. Important – drawer sections are supplied without shelves. Will accommodate pans (optional extra): 1/2 drawers up to 150mm, 1/3 drawers up to 100mm (top drawer max. 70mm on 1/3 drawers)



EP1/3H: 435 Ltr Counter Refrigerator

43-234

Drawer combination refrigerator counter

About the product

With EcoPro G3 Counters you get the best of both worlds: high performance coupled with low energy consumption, from the Refrigeration Experts.

Why choose this product

- A reduced footprint – the more compact design of G3 counters allow them to fit in the tightest of kitchen spaces without losing capacity
- Taking the travel out of food preparation and customised to your needs, G3 counters offer unrivalled flexibility and quality.
- High performance cyclopentane foam maintains thermal efficiency for longer
- Fully floating lock provides durable security and prevents lock breakage if the key is left in
- New and improved 'Airlines' ventilation system cools the compressor which reduces running time, saving you energy
- With PureControl, the G3's controller display uses pure LEDs, incorporating InGaN technology, which means it achieves higher resolution, lasts longer – all while using less power. Through the simple addition of a gateway, you're connectivity-ready
- High quality 304 stainless steel is used as standard on all doors and unit covers for G3 – the gold standard in performance stainless steel – meaning the heaviest usage touchpoints on the product are covered
- Drawers provide increased storage flexibility and easier access to ingredients

Specification

Technical

Refrigerant	R290
Temperature	Refrigerator +1/ +4°C
Electrical supply	230/50/1
Fuse rating (A)	10
Current (A)	0.8
Power (W)	182
Refrigerant mass (g)	110
Thermal heat rejection (W)	200

Dimensions

Height (mm)	865
Width (mm)	1815
Depth (mm)	700
Gross volume (ltr)	435
Net volume (ltr)	250.6
Leg type	Braked castors
GN size	1/1
Gross weight (kg)	175
Net weight (kg)	160

Build

Finish ext/int	304 S/S & 304 S/S
Number of sections	3
Section configuration	1/3-1/3-1/3
System	Integral
Worktop features	Standard

Energy

Climate Class	5
Energy grade	A
EEI	22.39
AEC (kWh)	541.09
GWP	3
Energy consumption (kWh/24hr)	1.48

Footnotes

- Castors not available if product supplied less condensing unit
- 100mm leg option: height ranges from 835 to 865mm (replacement for standard castors). 150mm legs: height ranges from 885 to 935mm
- Adequate airflow must be kept around the counter: 50mm
- Depth with door open is 1113mm
- Any mix of two or three drawer units is possible, as is any combination of drawers and doors. Important – drawer sections are supplied without shelves. Will accommodate pans (optional extra): 1/2 drawers up to 150mm, 1/3 drawers up to 100mm (top drawer max. 70mm on 1/3 drawers)



EP1/3H: 435 Ltr Counter Refrigerator

43-232

Drawer combination refrigerator counter

About the product

With EcoPro G3 Counters you get the best of both worlds: high performance coupled with low energy consumption, from the Refrigeration Experts.

Why choose this product

- A reduced footprint – the more compact design of G3 counters allow them to fit in the tightest of kitchen spaces without losing capacity
- Taking the travel out of food preparation and customised to your needs, G3 counters offer unrivalled flexibility and quality.
- High performance cyclopentane foam maintains thermal efficiency for longer
- Fully floating lock provides durable security and prevents lock breakage if the key is left in
- New and improved 'Airlines' ventilation system cools the compressor which reduces running time, saving you energy
- With PureControl, the G3's controller display uses pure LEDs, incorporating InGaN technology, which means it achieves higher resolution, lasts longer – all while using less power. Through the simple addition of a gateway, you're connectivity-ready
- High quality 304 stainless steel is used as standard on all doors and unit covers for G3 – the gold standard in performance stainless steel – meaning the heaviest usage touchpoints on the product are covered
- Drawers provide increased storage flexibility and easier access to ingredients

Specification

Technical		Dimensions	
Refrigerant	R290	Height (mm)	865
Temperature	Refrigerator +1/ +4°C	Width (mm)	1815
Electrical supply	230/50/1	Depth (mm)	700
Fuse rating (A)	10	Gross volume (ltr)	435
Current (A)	0.8	Net volume (ltr)	250.6
Power (W)	182	Leg type	Braked castors
Refrigerant mass (g)	110	GN size	1/1
Thermal heat rejection (W)	200	Gross weight (kg)	175
		Net weight (kg)	160

Build		Energy	
Finish ext/int	304 S/S & Alu	Climate Class	5
Number of sections	3	Energy grade	A
Section configuration	1/3-1/3-1/3	EEI	22.39
System	Integral	AEC (kWh)	541.09
Worktop features	Standard	GWP	3
		Energy consumption (kWh/24hr)	1.48

Footnotes

- Castors not available if product supplied less condensing unit
- 100mm leg option: height ranges from 835 to 865mm (replacement for standard castors). 150mm legs: height ranges from 885 to 935mm
- Adequate airflow must be kept around the counter: 50mm
- Depth with door open is 1113mm
- Any mix of two or three drawer units is possible, as is any combination of drawers and doors. Important – drawer sections are supplied without shelves. Will accommodate pans (optional extra): 1/2 drawers up to 150mm, 1/3 drawers up to 100mm (top drawer max. 70mm on 1/3 drawers)



EP1/3H: 435 Ltr Counter Refrigerator

43-226

Drawer combination refrigerator counter

About the product

With EcoPro G3 Counters you get the best of both worlds: high performance coupled with low energy consumption, from the Refrigeration Experts.

Why choose this product

- A reduced footprint – the more compact design of G3 counters allow them to fit in the tightest of kitchen spaces without losing capacity
- Taking the travel out of food preparation and customised to your needs, G3 counters offer unrivalled flexibility and quality.
- High performance cyclopentane foam maintains thermal efficiency for longer
- Fully floating lock provides durable security and prevents lock breakage if the key is left in
- New and improved 'Airlines' ventilation system cools the compressor which reduces running time, saving you energy
- With PureControl, the G3's controller display uses pure LEDs, incorporating InGaN technology, which means it achieves higher resolution, lasts longer – all while using less power. Through the simple addition of a gateway, you're connectivity-ready
- High quality 304 stainless steel is used as standard on all doors and unit covers for G3 – the gold standard in performance stainless steel – meaning the heaviest usage touchpoints on the product are covered
- Drawers provide increased storage flexibility and easier access to ingredients
- Operates in ambient temperatures of up to 43°C

Specification

Technical

Refrigerant	R290
Temperature	Refrigerator +1/+4°C
Electrical supply	230/50/1
Fuse rating (A)	10
Current (A)	0.8
Power (W)	182
Refrigerant mass (g)	110
Thermal heat rejection (W)	200

Dimensions

Height (mm)	865
Width (mm)	1815
Depth (mm)	700
Gross volume (ltr)	435
Net volume (ltr)	250.6
Leg type	Braked castors
GN size	1/1
Gross weight (kg)	175
Net weight (kg)	160

Build

Finish ext/int	304 S/S & 304 S/S
Number of sections	3
Section configuration	Left hinge-Left hinge-1/3
System	Integral
Worktop features	Standard

Energy

Climate Class	5
Energy grade	A
EEl	22.39
AEC (kWh)	541.09
GWP	3
Energy consumption (kWh/24hr)	1.48

Footnotes

- Castors not available if product supplied less condensing unit
- 100mm leg option: height ranges from 835 to 865mm (replacement for standard castors). 150mm legs: height ranges from 885 to 935mm
- Adequate airflow must be kept around the counter: 50mm
- Depth with door open is 1113mm
- Any mix of two or three drawer units is possible, as is any combination of drawers and doors. Important – drawer sections are supplied without shelves. Will accommodate pans (optional extra): 1/2 drawers up to 150mm, 1/3 drawers up to 100mm (top drawer max. 70mm on 1/3 drawers)



EP1/3H: 435 Ltr Counter Refrigerator

43-228

Drawer combination refrigerator counter

About the product

With EcoPro G3 Counters you get the best of both worlds: high performance coupled with low energy consumption, from the Refrigeration Experts.

Why choose this product

- A reduced footprint – the more compact design of G3 counters allow them to fit in the tightest of kitchen spaces without losing capacity
- Taking the travel out of food preparation and customised to your needs, G3 counters offer unrivalled flexibility and quality.
- High performance cyclopentane foam maintains thermal efficiency for longer
- Fully floating lock provides durable security and prevents lock breakage if the key is left in
- New and improved 'Airlines' ventilation system cools the compressor which reduces running time, saving you energy
- With PureControl, the G3's controller display uses pure LEDs, incorporating InGaN technology, which means it achieves higher resolution, lasts longer – all while using less power. Through the simple addition of a gateway, you're connectivity-ready
- High quality 304 stainless steel is used as standard on all doors and unit covers for G3 – the gold standard in performance stainless steel – meaning the heaviest usage touchpoints on the product are covered
- Drawers provide increased storage flexibility and easier access to ingredients
- Operates in ambient temperatures of up to 43°C

Specification

Technical

Refrigerant	R290
Temperature	Refrigerator +1/+4°C
Electrical supply	230/50/1
Fuse rating (A)	10
Current (A)	0.8
Power (W)	182
Refrigerant mass (g)	110
Thermal heat rejection (W)	200

Dimensions

Height (mm)	865
Width (mm)	1815
Depth (mm)	700
Gross volume (ltr)	435
Net volume (ltr)	250.6
Leg type	Braked castors
GN size	1/1
Gross weight (kg)	175
Net weight (kg)	160

Build

Finish ext/int	304 S/S & Alu
Number of sections	3
Section configuration	Left hinge-1/3- 1/3
System	Integral
Worktop features	Standard

Energy

Climate Class	5
Energy grade	A
EEl	22.39
AEC (kWh)	541.09
GWP	3
Energy consumption (kWh/24hr)	1.48

Footnotes

- Castors not available if product supplied less condensing unit
- 100mm leg option: height ranges from 835 to 865mm (replacement for standard castors). 150mm legs: height ranges from 885 to 935mm
- Adequate airflow must be kept around the counter: 50mm
- Depth with door open is 1113mm
- Any mix of two or three drawer units is possible, as is any combination of drawers and doors. Important – drawer sections are supplied without shelves. Will accommodate pans (optional extra): 1/2 drawers up to 150mm, 1/3 drawers up to 100mm (top drawer max. 70mm on 1/3 drawers)



EP1/3H: 435 Ltr Counter Refrigerator

43-224

Drawer combination refrigerator counter

About the product

With EcoPro G3 Counters you get the best of both worlds: high performance coupled with low energy consumption, from the Refrigeration Experts.

Why choose this product

- A reduced footprint – the more compact design of G3 counters allow them to fit in the tightest of kitchen spaces without losing capacity
- Taking the travel out of food preparation and customised to your needs, G3 counters offer unrivalled flexibility and quality.
- High performance cyclopentane foam maintains thermal efficiency for longer
- Fully floating lock provides durable security and prevents lock breakage if the key is left in
- New and improved 'Airlines' ventilation system cools the compressor which reduces running time, saving you energy
- With PureControl, the G3's controller display uses pure LEDs, incorporating InGaN technology, which means it achieves higher resolution, lasts longer – all while using less power. Through the simple addition of a gateway, you're connectivity-ready
- High quality 304 stainless steel is used as standard on all doors and unit covers for G3 – the gold standard in performance stainless steel – meaning the heaviest usage touchpoints on the product are covered
- Drawers provide increased storage flexibility and easier access to ingredients
- Operates in ambient temperatures of up to 43°C

Specification

Technical

Refrigerant	R290
Temperature	Refrigerator +1/+4°C
Electrical supply	230/50/1
Fuse rating (A)	10
Current (A)	0.8
Power (W)	182
Refrigerant mass (g)	110
Thermal heat rejection (W)	200

Dimensions

Height (mm)	865
Width (mm)	1815
Depth (mm)	700
Gross volume (ltr)	435
Net volume (ltr)	250.6
Leg type	Braked castors
GN size	1/1
Gross weight (kg)	175
Net weight (kg)	160

Build

Finish ext/int	304 S/S & Alu
Number of sections	3
Section configuration	Left hinge-Left hinge-1/3
System	Integral
Worktop features	Standard

Energy

Climate Class	5
Energy grade	A
EEl	22.39
AEC (kWh)	541.09
GWP	3
Energy consumption (kWh/24hr)	1.48

Footnotes

- Castors not available if product supplied less condensing unit
- 100mm leg option: height ranges from 835 to 865mm (replacement for standard castors). 150mm legs: height ranges from 885 to 935mm
- Adequate airflow must be kept around the counter: 50mm
- Depth with door open is 1113mm
- Any mix of two or three drawer units is possible, as is any combination of drawers and doors. Important – drawer sections are supplied without shelves. Will accommodate pans (optional extra): 1/2 drawers up to 150mm, 1/3 drawers up to 100mm (top drawer max. 70mm on 1/3 drawers)

По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +(727)345-47-04

Беларусь +(375)257-127-884

Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

эл.почта: fdf@nt-rt.ru || сайт: <https://foster.nt-rt.ru/>